



## ICY BOX IB-DK4040-CPD

### USB Type-C™ Docking Station with two video interfaces

#### Key features

- Premium aluminium enclosure
- Data transfer, video/audio and Power Delivery via one Type-C™ cable
- Two video interfaces (HDMI® and VGA)
- High Speed HDMI® resolution up to 3840x2160@30 Hz
- VGA resolution up to 1920x1080P@60 Hz
- Three USB 3.0 Type-A interfaces, data transfer rate with up to 5 Gbit/s
- One Type-C™ charging port for Power Delivery with up to 100 W, no data transfer
- SD 2.0 and microSD 2.0 single LUN card reader for most common card specifications
- 3.5 mm stereo combo jack (microphone / audio out)
- Gigabit LAN RJ45 interface with up to 10/100/1000 Mbit/s



#### Packing content

IB-DK4040-CPD, manual  
No power supply included (only necessary for Power Delivery)

## USB Type-C™ Notebook Docking Station

Docking Stations not only offer users a way to quickly transition from one working environment to another via a single cable, they can also add additional functionality and capabilities to notebook designs that are increasingly favoring form over function.

#### Technical data

<b>Model</b>	IB-DK4040-CPD
<b>Article no.</b>	60514
<b>EAN code</b>	4250078168966
<b>Brand</b>	ICY BOX
<b>Colour</b>	Anthracite / black
<b>Material</b>	Aluminium + plastic
<b>Input interface</b>	USB Type-C™ to host computer, integrated cable, 20 cm
<b>Output interface</b>	1x High Speed HDMI® Type-A 1x VGA 3x USB 3.0 Type-A 1+1 SD/microSD 2.0 1x Gigabit LAN RJ45 interface 1x 3.5 mm stereo combo jack (microphone in / audio out) 1x Type-C™ charging port for Power Delivery up to 100 W (20 V@5 A), no data transfer
<b>Video resolution</b>	High Speed HDMI® up to 1x 3840x2160@30 Hz VGA up to 1920x1200@60 Hz

#### Data transfer rate

USB 3.0: up to 5 Gbit/s, UASP supported  
LAN: up to 10/100/1000 Mbit/s  
SD 2.0 / microSD 2.0: up to 480 MBit/s

#### Power supply

Bus powered

#### Power Delivery

Supports up to 100 W from original power supply of the computer  
Windows® 10, macOS®

#### Operating system

USB Type-C™ enabled Windows® / macOS® computer, DisplayPort™ Alt Mode and Power Delivery support required!  
Supports only SST (Single Stream Protocol)  
Dual video output: HDMI® and VGA synchronous display (only mirrored)


#### System requirements

Single-LUN - the card reader can only work with one memory card at a time  
The device is compatible with Thunderbolt™ 3 equipped computers

DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. The terms HDMI® and HDMI® High-Definition Multimedia Interface, and the HDMI® logo are trademarks or registered trademarks of HDMI® LA, Inc. in the United States and other countries.



## ICY BOX **IB-DK4040-CPD** USB Type-C™ Docking Station with two video interfaces

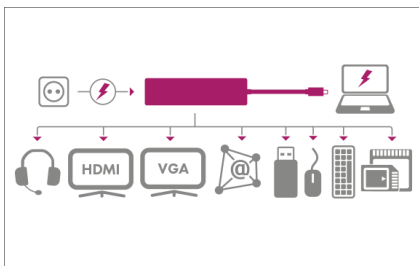

### USB Type-C™

The Type-C™ connection offers incredible versatility. It combines data transmission, video output and power in a single, compact port. The integration of USB Type-C™ makes the connection even more practical, as it has a twist-proof connection as its physical feature - making it a truly universal connection.



### Easy connection - multiple benefits

Perfectly combines high-quality appearance and efficient technology with a very compact size. The premium aluminium Docking Station does not only look good but also offers high comfort while using. This solution is suited for any location such as private or office areas.



### Always informed

The IB-DK4040-CPD provides two different video interfaces and enables you to connect a HDMI® and VGA device simultaneously in mirror mode.

#### Logistical data

<b>Packing unit:</b>	60 pcs./carton
<b>Total weight:</b>	10.7 kg/carton
<b>Gross weight (with packing):</b>	0.176 kg
<b>Net weight:</b>	0.164 kg

<b>Dimension/carton:</b>	460x330x280 mm
<b>Dimension (with packing):</b>	100x25x200 mm
<b>Dimension of article:</b>	115x60x17 mm
<b>Country of origin:</b>	China