



ICY BOX IB-DK4034-CPD

USB Type-C™ notebook DockingStation

Key features

- USB Type-C™ notebook DockingStation with six additional interfaces
- **Input** (to notebook / PC): USB 3.0 Type-C™
- **Output:** 1x High Speed HDMI® Type-A (up to 3840x2160@30 Hz)
2x USB 3.0 Type-A (USB 3.0 downward compatible to USB 2.0)
1x Gigabit Ethernet RJ45, 1x SD card reader (tested up to 128 GB)
1x USB Type-C™ with Power Delivery (PD) function (max. 20 V@5 A)
- Mirroring and extending of the notebook display via HDMI®
- Bus powered, no power supply necessary

Note: Only pass through from downstream USB Type-C™ to upstream for connecting the Type-C™ power supply of the notebook in use.



Packing content

1x IB-DK4034-CPD, 1x quick installation guide

Notebook DockingStation

The USB Type-C™ notebook DockingStation is designed for extra connectivity demands of a notebooks or other computers. With the DockingStation, you can extend the USB Type-C™ connection of a computer to one more HDMI® display, Ethernet network, USB peripherals, SD cards and Power Delivery (PD) function via the USB Type-C™ interface.

Technical data

Model	IB-DK4034-CPD
Article no.	60213
EAN / GTIN code	4250078165521
Brand	ICY BOX
Colour	Silver/white
Material	Aluminium + PC + ABS
Chipset	VL100, VL813, PS176, RTL8153
Input interface	USB Type-C™ (UFP) from host PC, USB Type-C™ (DFP) to host PC (only for PC power delivery up to 20 V@5 A)

Output interface

1x High Speed HDMI®, 2x USB 3.0 Type-A (DFP), 1x Gigabit Ethernet RJ45, 1x SD card reader, 1x USB Type-C™ only with PD function
Up to 5 Gbit/s

USB 3.0 speed

Up to 3840x2160@30 Hz

HDMI

Power supply

Bus powered via USB Type-C™ port

Operating system


Windows® 10 and above

System requirements

macOS® 10.11.x and above, PC with USB Type-C™ interface supporting DisplayPort™ Alt Mode



ICY BOX IB-DK4034-CPD USB Type-C™ notebook DockingStation

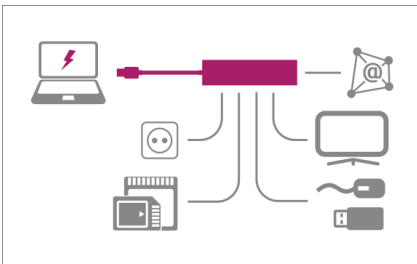

A bit of everything

With a USB Type-C™ host, the door is opened for five additional ports, 1x Gigabit Ethernet, 1x SD cardreader, 1x HDMI® and 2x USB 3.0 Type-A are opened. In addition, mobile devices can be charged when the appropriate power supply is connected.



A bit of input

USB Type-C™ is the new standard for PCs, notebooks, tablets and the like. The high data transfer rate of the USB 3.0 protocol of up to 5 Gbit/s serves this adapter very well.



Slim and elegant

Due to the low height, the IB-DK4034-CPD is very handy as well as flexible for many situations. With the integrated USB Type-C™ cable you can always get a connection with the latest PCs, laptops or mobile devices.

Logistical data

Packing unit: 60 pcs./carton
Total weight: 10.4 kg/carton
Gross weight: (with packing): 0.161 kg
Net weight: 0.085 kg

Dimension/carton: 440x335x290 mm
Dimension (with packing): 200x100x25 mm
Dimension of article: 117x46x16 mm
Country of origin: China